

TRR TESTER TRRテスター



TRR610B 10A

- TRR610B has a wide setting range from 0.5A to 10A for IF/IR current. This tester has a structure to connect with a heater unit for high temperature measurement.
- TRR610BはIF/IR電流が0.5A~10Aまでと広い設定範囲を持っています。高温での測定を考慮しヒーターとの接続が可能な構造となっています。

MODEL	TRR610B
PRE/POST TEST	V _F > 3V...OPEN V _F < 0.2V...SHORT
DRIVER CHECK	V _{DS} > 20V...OPEN V _{DS} < V _{rr} setting × 80%...SHORT
MEASUREMENT RANGE	
+V _g VOLTAGE	5.0V~+19.9V
-V _g VOLTAGE	0V~-19.9V
ON TIME	0.1 μs~999.9 μs
OFF TIME	0.1 μs~99.9 μs
V _{rr}	40V~600V
MEASUREMENT RANGE(T _{rr})	15ns~
DIMENSIONS & WEIGHT	
MAIN UNIT	430(W)×700(D)×245(H)...41kg
POWER ON UNIT	430(W)×356(D)×123(H)...10kg
HEAD BOX	295(W)×490(D)×170(H)...17kg



Measurement Waveform

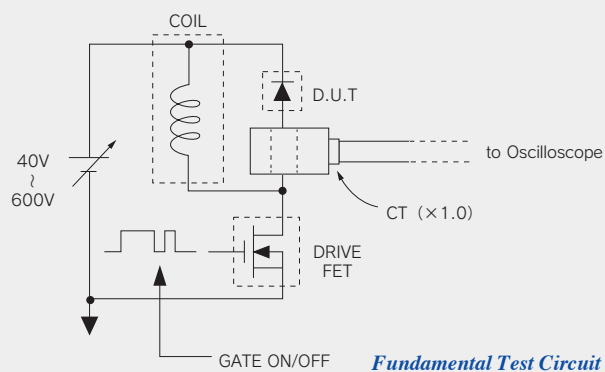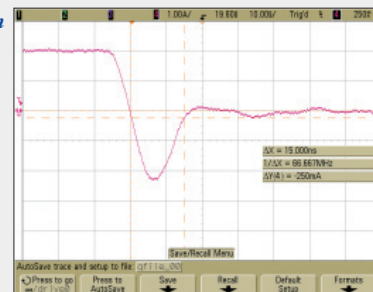

Fundamental Test Circuit